

Technical Data

Sirion 2™



S

M

P

SP

Sirion 2 S

Earhook damped

- 62 dB / 132 dB SPL (ear simulator)
- 55 dB / 124 dB SPL (2 ccm coupler)

LifeTube

- 53 dB / 125 dB SPL (ear simulator)
- 45 dB / 124 dB SPL (2 ccm coupler)

Sirion 2 M

Earhook damped

- 68 dB / 136 dB SPL (ear simulator)
- 60 dB / 130 dB SPL (2 ccm coupler)

LifeTube

- 62 dB / 128 dB SPL (ear simulator)
- 53 dB / 125 dB SPL (2 ccm coupler)

Sirion 2 P

Earhook damped

- 75 dB / 136 dB SPL (ear simulator)
- 70 dB / 130 dB SPL (2 ccm coupler)

Earhook undamped

- 78 dB / 140 dB SPL (ear simulator)
- 75 dB / 136 dB SPL (2 ccm coupler)

LifeTube

- 66 dB / 129 dB SPL (ear simulator)
- 65 dB / 125 dB SPL (2 ccm coupler)

Sirion 2 SP

Earhook undamped



- 84 dB / 144 dB SPL (ear simulator)
- 80 dB / 140 dB SPL (2 ccm coupler)

Data Sheet



usa.bestsoundtechnology.com

SIEMENS



Sirion 2 S · Technical Data

Type	Earhook damped		LifeTube	
				
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level				
at 1.6 kHz	–	129 dB SPL	–	116 dB SPL
Peak	124 dB SPL	132 dB SPL	124 dB SPL	125 dB SPL
HFA-OSPL 90	121 dB SPL	–	113 dB SPL	–
Gain				
Full on gain (FOG) at 1.6 kHz	–	49 dB	–	48 dB
Full on gain (Peak)	55 dB	62 dB	45 dB	53 dB
HFA-FOG	42 dB	–	41 dB	–
Reference test gain	42 dB	42 dB	36 dB	41 dB
Frequency, noise and directivity				
Frequency range	100-7100 Hz	1000-7100 Hz	100-7100 Hz	280-7100 Hz
Equivalent input noise	20 dB SPL	23 dB SPL	15 dB SPL	15 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	2 / 1 / 1 %	2 / 1 / 1 %	1 / 1 / 2 %	1 / 1 / 2 %
Tinnitus therapy broadband	–	–	–	–
AI-DI	3.5 dB		3.5 dB	
Inductive coil sensitivity				
MASL (1 mA/m) at 1.6 kHz	–	–	–	–
HFA MASL (1 mA/m)	–	–	–	–
HFA SPLITS (left/right)	–	–	–	–
RSETS (left/right)	–	–	–	–
Battery				
Battery voltage	1.3 V		1.3 V	
Battery current drain	0.9 mA		0.9 mA	
Battery life (cell zinc air)	~125 h		~125 h	
Battery life (rechargeable)	–		–	
IRIL IEC 118-13:2004 (bystander)				
800-960 MHz	<-10 dB SPL		<-10 dB SPL	
1400-2000 MHz	<-10 dB SPL		<-10 dB SPL	
ANSI C63.19	M3		M3	


Sirion 2 M · Technical Data

Type	Earhook damped		LifeTube	
				
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level				
at 1.6 kHz	–	133 dB SPL	–	121 dB SPL
Peak	130 dB SPL	136 dB SPL	125 dB SPL	128 dB SPL
HFA-OSPL 90	126 dB SPL	–	116 dB SPL	–
Gain				
Full on gain (FOG) at 1.6 kHz	–	61 dB	–	54 dB
Full on gain (Peak)	60 dB	68 dB	53 dB	62 dB
HFA-FOG	53 dB	–	46 dB	–
Reference test gain	49 dB	54 dB	39 dB	46 dB
Frequency, noise and directivity				
Frequency range	100-7000 Hz	320-7200 Hz	100-7000 Hz	120-7200 Hz
Equivalent input noise	19 dB SPL	19 dB SPL	19 dB SPL	19 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	2 / 2 / 1 %	2 / 2 / 1 %	1 / 1 / 2 %	1 / 1 / 3 %
Tinnitus therapy broadband	–	–	–	–
AI-DI	3.5 dB		3.5 dB	
Inductive coil sensitivity				
MASL (1 mA/m) at 1.6 kHz	–	89 dB SPL	–	82 dB SPL
HFA MASL (1 mA/m)	82 dB SPL	–	74 dB SPL	–
HFA SPLITS (left/right)	102 / 105 dB SPL	–	93 / 95 dB SPL	–
RSETS (left/right)	-7 / -4 dB	–	-6 / -4 dB	–
Battery				
Battery voltage	1.3 V		1.3 V	
Battery current drain	1.0 mA		1.0 mA	
Battery life (cell zinc air)	~220 h		~220 h	
Battery life (rechargeable)	–		–	
IRIL IEC 118-13:2004 (bystander)				
800-960 MHz	<-20 dB SPL		<-20 dB SPL	
1400-2000 MHz	<-15 dB SPL		<-15 dB SPL	
ANSI C63.19	M4 / T2		M4 / T2	

Sirion 2 P · Technical Data


Type	Earhook damped		Earhook undamped		LifeTube	
						
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level						
at 1.6 kHz	–	130 dB SPL	–	132 dB SPL	–	119 dB SPL
Peak	130 dB SPL	136 dB SPL	136 dB SPL	140 dB SPL	125 dB SPL	129 dB SPL
HFA-OSPL 90	123 dB SPL	–	128 dB SPL	–	114 dB SPL	–
Gain						
Full on gain (FOG) at 1.6 kHz	–	68 dB	–	70 dB	–	53 dB
Full on gain (Peak)	70 dB	75 dB	75 dB	78 dB	65 dB	66 dB
HFA-FOG	62 dB	–	66 dB	–	49 dB	–
Reference test gain	47 dB	54 dB	50 dB	57 dB	37 dB	43 dB
Frequency, noise and directivity						
Frequency range	100-6900 Hz	150-7000 Hz	100-5800 Hz	150-6500 Hz	100-5800 Hz	100-6000 Hz
Equivalent input noise	19 dB SPL	19 dB SPL	19 dB SPL	19 dB SPL	28 dB SPL	28 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	2 / 1 / 1 %	2 / 1 / 1 %	3 / 2 / 1 %	5 / 2 / 2 %	1 / 1 / 2 %	1 / 2 / 3 %
Tinnitus therapy broadband	–	–	–	–	–	–
AI-DI	3.5 dB		3.5 dB		3.5 dB	
Inductive coil sensitivity						
MASL (1 mA/m) at 1.6 kHz	–	99 dB SPL	–	99 dB SPL	–	83 dB SPL
HFA MASL (1 mA/m)	92 dB SPL	–	95 dB SPL	–	80 dB SPL	–
HFA SPLITS (left/right)	105 / 105 dB SPL	–	108 / 108 dB SPL	–	96 / 96 dB SPL	–
RSETS (left/right)	-2 / -2 dB	–	-2 / -2 dB	–	-1 / -1 dB	–
Battery						
Battery voltage	1.3 V		1.3 V		1.3 V	
Battery current drain	1.0 mA		1.2 mA		1.3 mA	
Battery life (cell zinc air)	~220 h		~190 h		~170 h	
Battery life (rechargeable)	–		–		–	
IRIL IEC 118-13:2004 (bystander)						
800-960 MHz	<-23 dB SPL		<-23 dB SPL		<-23 dB SPL	
1400-2000 MHz	<-15 dB SPL		<-15 dB SPL		<-15 dB SPL	
ANSI C63.19	M4 / T2		M4 / T2		M4 / T2	

Sirion 2 SP · Technical Data

Type	Earhook undamped	
		
	2 ccm coupler	Ear simulator
Output sound pressure level		
at 1.6 kHz	–	139 dB SPL
Peak	140 dB SPL	144 dB SPL
HFA-OSPL 90	133 dB SPL	–
Gain		
Full on gain (FOG) at 1.6 kHz	–	76 dB
Full on gain (Peak)	80 dB	84 dB
HFA-FOG	72 dB	–
Reference test gain	56 dB	64 dB
Frequency, noise and directivity		
Frequency range	100-5600 Hz	100-5900 Hz
Equivalent input noise	24 dB SPL	26 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	3 / 2 / 1 %	7 / 3 / 2 %
Tinnitus therapy broadband	–	–
AI-DI	3.6 dB	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	–	107 dB SPL
HFA MASL (1 mA/m)	102 dB SPL	–
HFA SPLITS (left/right)	115 / 112 dB SPL	–
RSETS (left/right)	-1 / -4 dB	–
Battery		
Battery voltage	1.3 V	
Battery current drain	2.4 mA	
Battery life (cell zinc air)	~160 h	
Battery life (rechargeable)	–	
IRIL IEC 118-13:2011 (bystander)		
800-960 MHz	<-34 dB SPL	
1400-2000 MHz	<-34 dB SPL	
ANSI C63.19	M3 / T4	


Fitting Range

Sirion 2 S

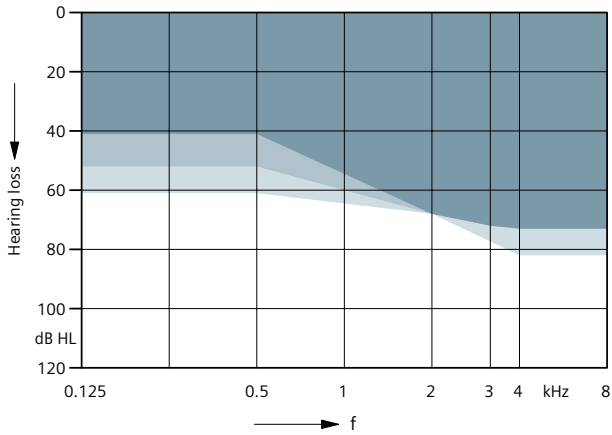


- LifeTube open
- + LifeTube double
- + Earhook damped

Sirion 2 M

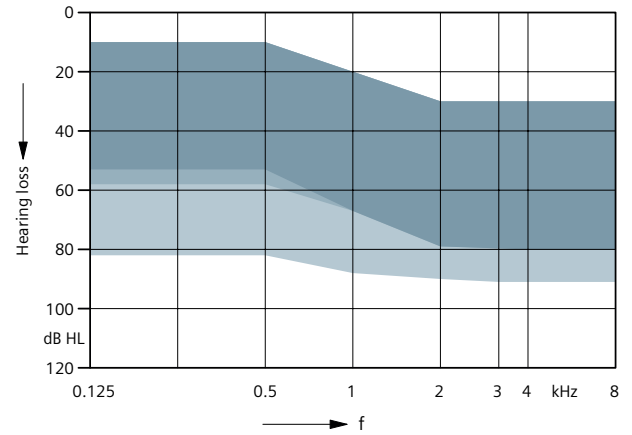


- LifeTube open
- + LifeTube double
- + Earhook damped

Sirion 2 P

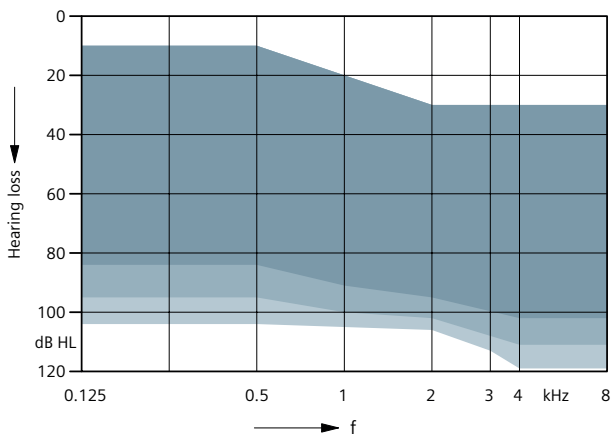

- LifeTube double
- + Earhook damped
- + Earhook undamped


Sirion 2 SP

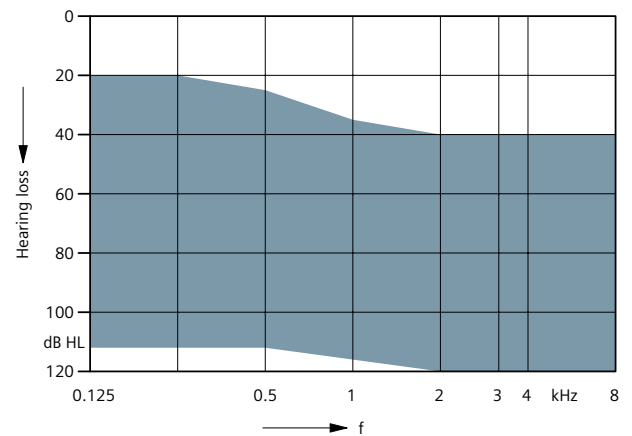

- Earhook undamped


Sirion 2 S (Earhook damped) · Basic Data

2 ccm coupler

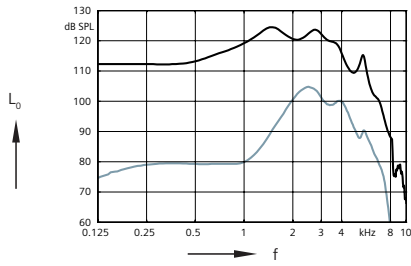


Output sound pressure level
(L₁ = 90 dB)

Full on gain
(L₁ = 50 dB)

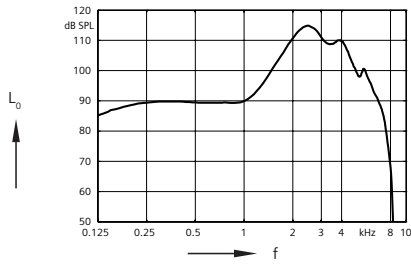


Frequency response
(L₁ = 60 dB)

Ear simulator

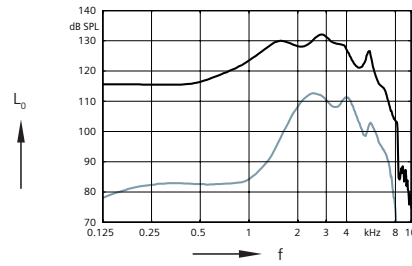

Output sound pressure level
(L₁ = 90 dB)


Full on gain
(L₁ = 50 dB)

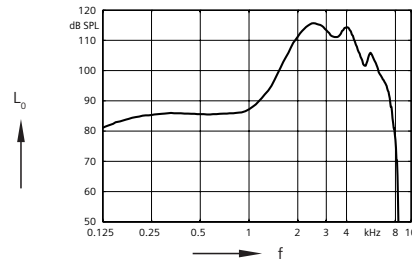

Basic acoustic response
(L₁ = 60 dB)


Sirion 2 S (LifeTube) · Basic Data

2 ccm coupler

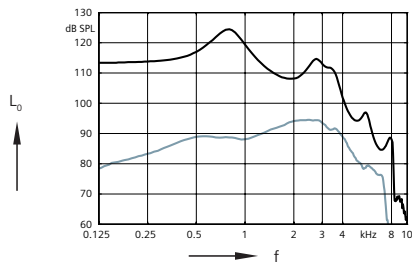


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

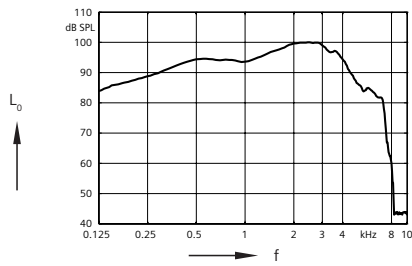


Frequency response
($L_1 = 60$ dB)

Ear simulator

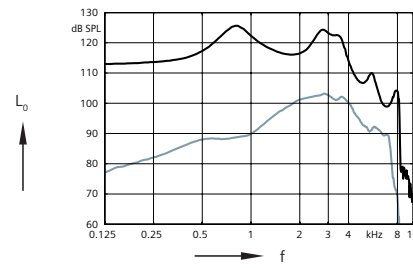

Output sound pressure level
($L_1 = 90$ dB)


Full on gain
($L_1 = 50$ dB)

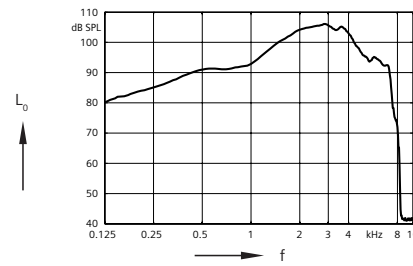

Basic acoustic response
($L_1 = 60$ dB)


Sirion 2 M (Earhook damped) · Basic Data

2 ccm coupler

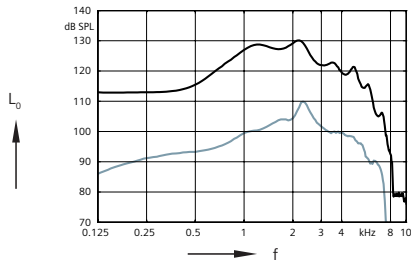


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

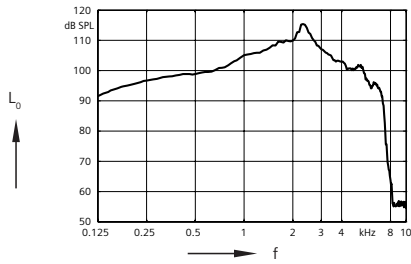


Frequency response
($L_1 = 60$ dB)

Ear simulator

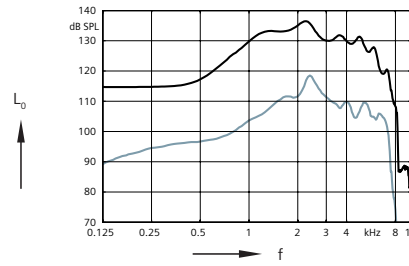


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

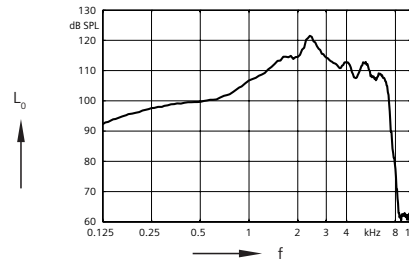


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

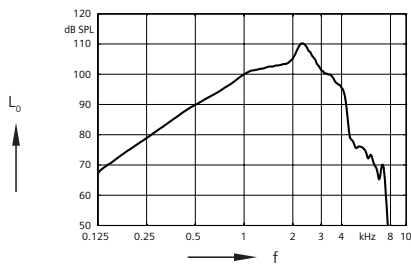

Inductive response
($H = 10$ mA/m)

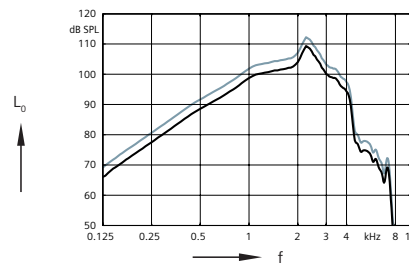


SPLITS curve left
($H = 31.6$ mA/m)

SPLITS curve right
($H = 31.6$ mA/m)


Sirion 2 M (LifeTube) · Basic Data

2 ccm coupler

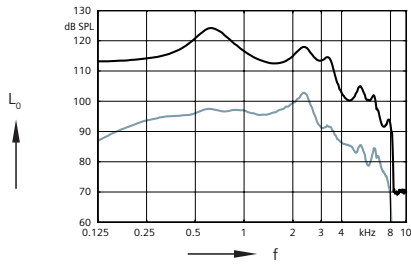


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

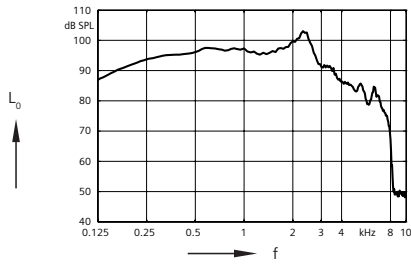


Frequency response
($L_1 = 60$ dB)

Ear simulator

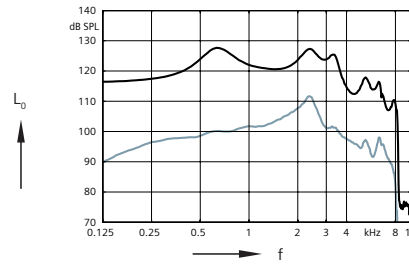


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

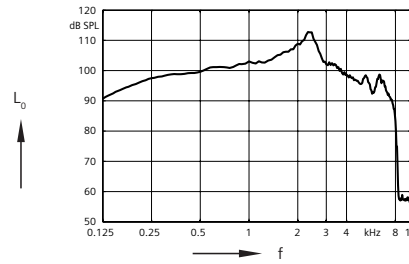


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

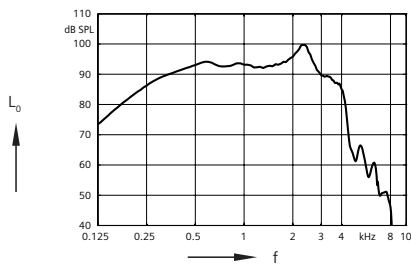

Inductive response
($H = 10$ mA/m)

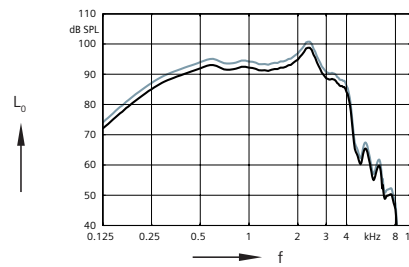


SPLITS curve left
($H = 31.6$ mA/m)

SPLITS curve right
($H = 31.6$ mA/m)


Sirion 2 P (Earhook damped) · Basic Data

2 ccm coupler

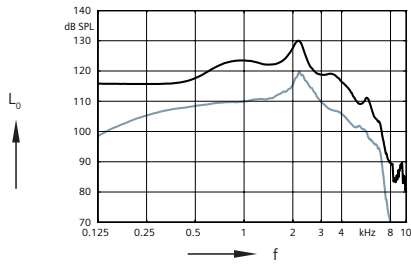


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

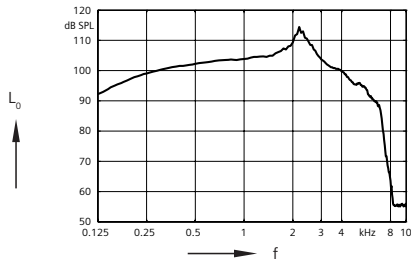


Frequency response
($L_1 = 60$ dB)

Ear simulator

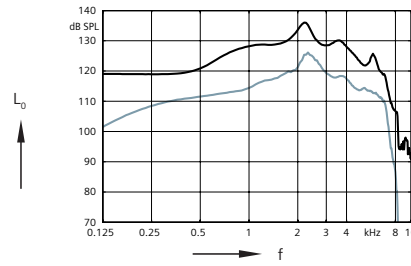


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

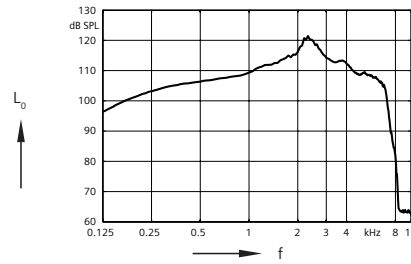


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

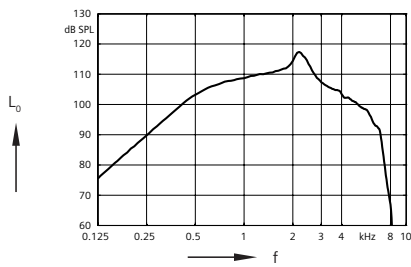

Inductive response
($H = 10$ mA/m)

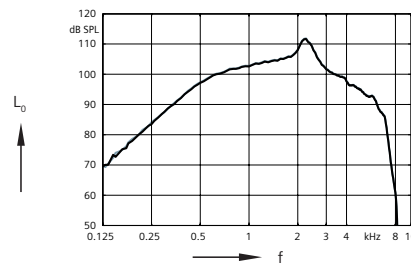


SPLITS curve left
($H = 31.6$ mA/m)

SPLITS curve right
($H = 31.6$ mA/m)


Sirion 2 P (Earhook undamped) · Basic Data

2 ccm coupler

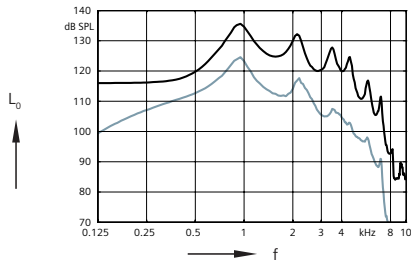


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

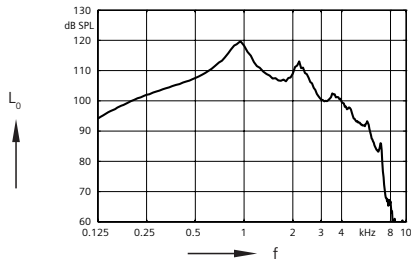


Frequency response
($L_1 = 60$ dB)

Ear simulator

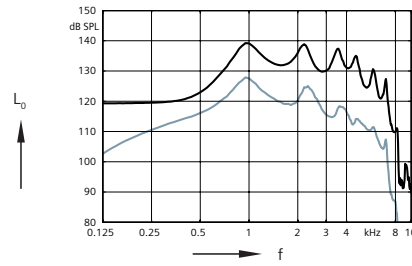


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

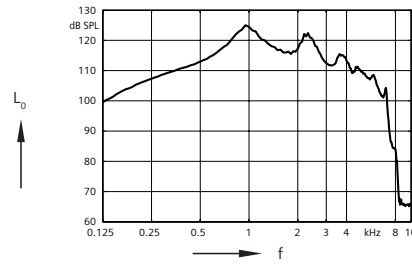


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

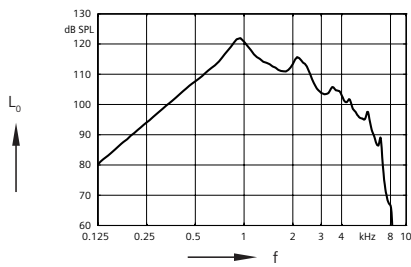

Inductive response
($H = 10$ mA/m)


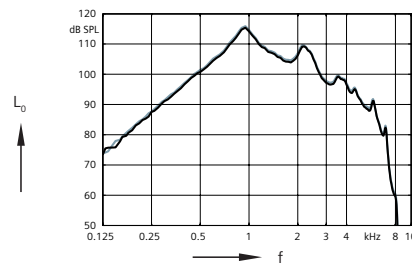


SPLITS curve left
($H = 31.6$ mA/m)



SPLITS curve right
($H = 31.6$ mA/m)

Sirion 2 P (LifeTube) · Basic Data



2 ccm coupler

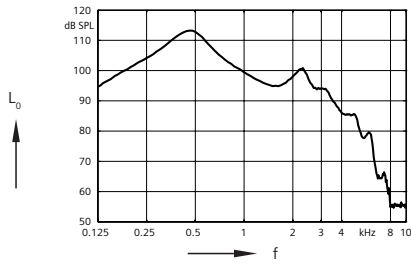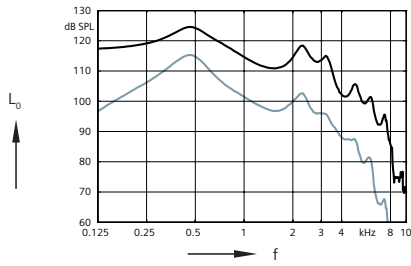

Ear simulator

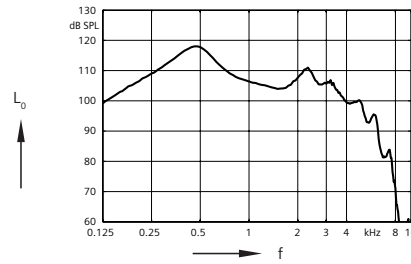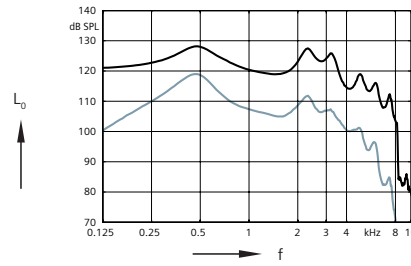


Inductive response

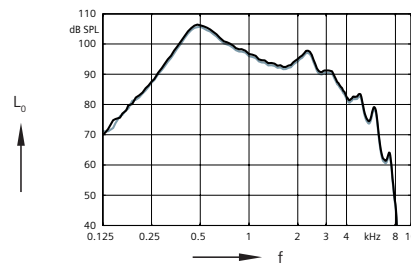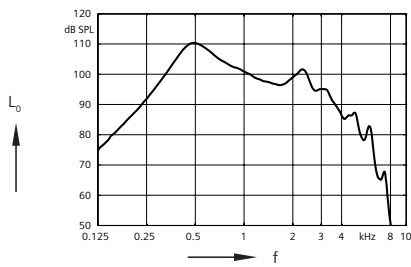


Sirion 2 SP (Earhook undamped) · Basic Data

2 ccm coupler

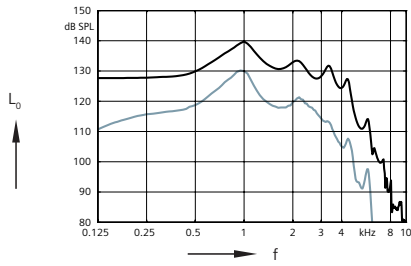


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

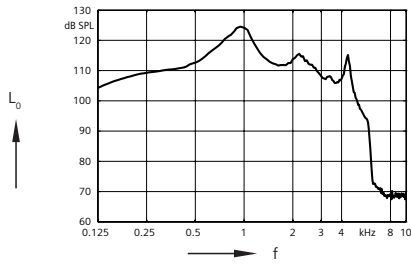


Frequency response
($L_1 = 60$ dB)

Ear simulator

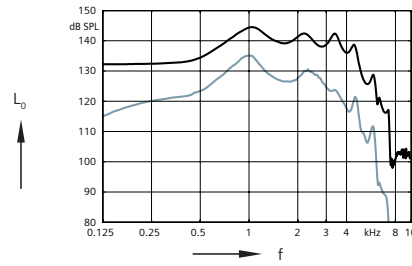


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

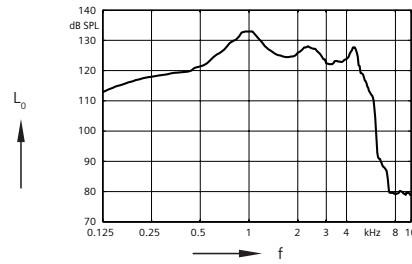


Basic acoustic response
($L_1 = 60$ dB)

Inductive response

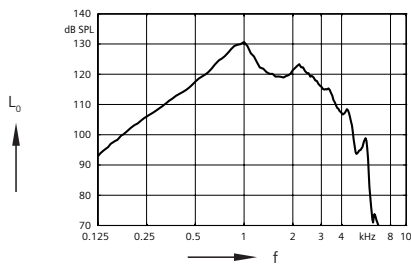

Inductive response
($H = 10$ mA/m)

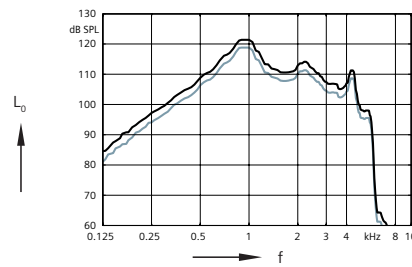

SPLITS curve left
($H = 31.6$ mA/m)

SPLITS curve right
($H = 31.6$ mA/m)

Features and Accessories

Sirion 2 S / M / P / SP

General

Signal processing (channels)

16

Gain/MPO (handles)

8

Hearing programs

4

touchControl™ App (iOS™ / Android™)

●

Audibility

Directional microphone (channels)

16

Narrow Directionality
(req. bilateral fitting and e2e 3.0)

—

Spatial SpeechFocus
(req. bilateral fitting and e2e 3.0)

—

SpeechFocus

—

TruEar™

—

Frequency compression

●

Sound Quality

eWindScreen binaural
(req. bilateral fitting and e2e 3.0)

—

eWindScreen™ (steps)

—

Extended bandwidth

—

SoundBrilliance™
(streaming only, req. easyTek)

—

Adaptive streaming volume
(streaming only, req. easyTek™)

—

Feedback cancellation

●

Speech and noise management
(channels / steps)

16 / on / off

SoundSmoothing™
(channels / steps)

—

Directional speech enhancement
(channels / steps)

—

Individuality

Sound equalizer (classes)

—

Data logging

●

Learning (classes)

—

Acclimatization manager

●

ConnexxFit

●

Spatial Configurator
(req. bilateral fitting and e2e 3.0)

—

Span
(req. easyTek and easyTek App or Rocker switch)

—

Direction
(req. easyTek and easyTek App)

—

Tinnitus Therapy

Standard (handles / presets)

—

Ocean Waves (presets)

—

Features and Accessories

	Sirion 2			
	S	M	P	SP
Style Specific Features				
Ingress Protection Rating	IP67	IP67	IP67	—
Telecoil	—	●	●	●
AutoPhone®	—	—	—	—
Charging contacts	—	—	—	—
Battery Size	312	13	13	675
Battery door on/off function	●	●	●	●
Nanocoated housing	●	●	●	●
e2e wireless® 3.0	—	—	—	—
Audio streaming	—	—	—	—
User controls coupling via e2e	—	—	—	—
Wireless programming via ConnexxLink®	—	—	—	—
Instrument configurations				
Flat cover	—	—	—	—
Push button	●	—	●	●
Rocker switch	—	●	●	●
Color conversion kit	○	○	○	—
Battery door – direct audio input	—	○	○	○
Battery door – child lock	—	—	—	—
Tamperproof battery door	—	○	○	—
Programming Accessories				
ConnexxLink	—	—	—	—
Programming adapter	●	●	●	●
Accessories				
miniPocket	●	●	●	●
eCharger™	—	—	—	—
easyPocket™	—	—	—	—
easyTek™	—	—	—	—
TV Transmitter (req. easyTek)	—	—	—	—
Transmitter (req. easyTek)	—	—	—	—
VoiceLink™ (req. easyTek)	—	—	—	—
App				
easyTek App (req. easyTek)	—	—	—	—
touchControl™ App	●	●	●	●

● available ○ optional — not available

Abbreviations and Standards

Abbreviations

The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

Standards

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2009 and IEC 60118-7:2005 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1 and to DIN 45605 (frequency range) if applicable.
- ▶ Tinnitus therapy measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Android™ and Google Play™ are trademarks of Google Inc.

WARNING

Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years and persons of mental incapacity.

WARNING

Instrument has an output sound pressure level of 132 dB SPL or more.

Risk of impairing the residual hearing of the user.

- ▶ Take special care when fitting this instrument.

Copyright © 2016 Signia GmbH. All rights reserved.
Sivantos, Inc. is a Trademark Licensee of Siemens AG.

9/16 1.0 SI/17053-16

Legal Manufacturer

Sivantos, Inc.
10 Constitution Avenue
Piscataway, NJ 08854
Phone: (800) 766-4500
Fax: (732) 562-6696
www.sivantos.com