

WIDEX UNIQUE™ CIC MICRO WITH SOUND CLASS TECHNOLOGY

4 PERFORMANCE LEVELS 440/330/220/110



The WIDEX UNIQUE CIC MICRO is based upon the new WIDEX U-Platform with Sound Class Technology for automated classification of sound environments and optimal sound processing determined by the sound classes.

The non-wireless UNIQUE CIC MICRO is perfect for clients who prefer the smallest possible and most discreet solution, and still with outstanding Sound Class Technology.

Uses a size 10 battery.

Minimal to severe hearing losses.

STANDARD TECHNOLOGY

- U Platform with Sound Class Technology
- Power Saver III technology: Low current consumption


KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	6	4

UNIQUE FEATURES

FEATURE	440	330	220	110
U platform	•	•	•	•
High-frequency boost	•			
Soft-level noise reduction	•	•	•	•
TruSound SoftEner	•	•	•	
Speech Enhancer	U	U		
Noise Reduction	•	•	•	•
Sound Class Technology	9	5	3	1
Processing and fine tuning channels	15	10	6	4
Audibility Extender	U	U	U	U
Variable Speed Compression	U	U	U	U

Protection Class IP58

SUGGESTED FITTING RANGE

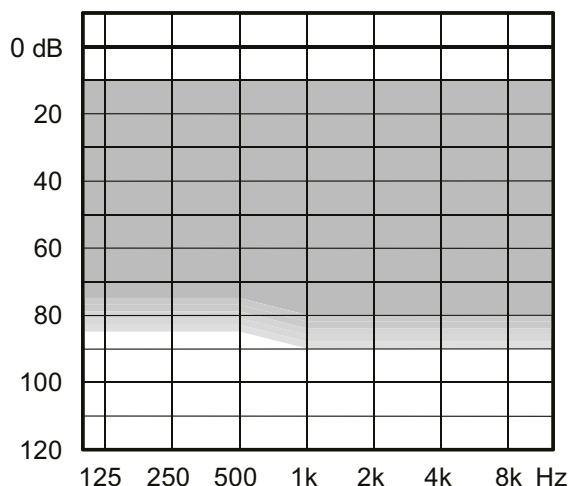


U-CIC-M

MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

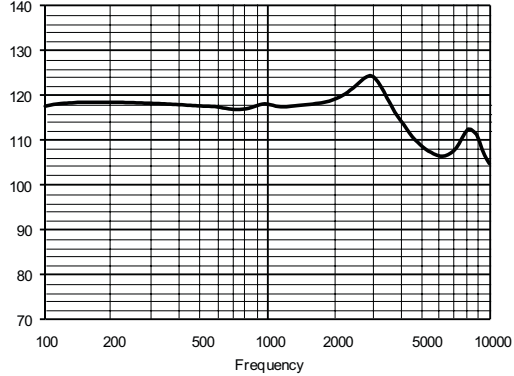

MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

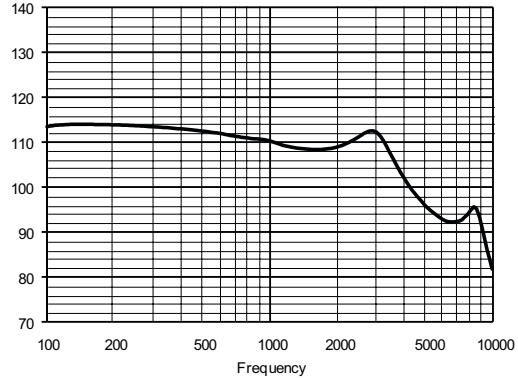

OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

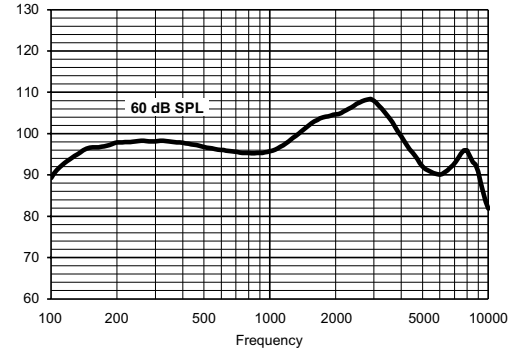

OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

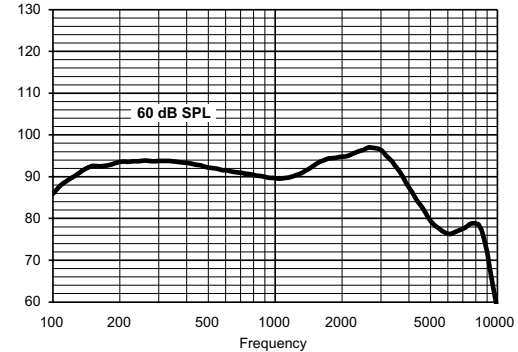

Technical data Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard, and with a 5 x 1.55mm tube. For further information, please contact Widex via Widex.com.

		IEC 60118-0	IEC 60118-7 / ANSI S3.22-2009
OSPL90	1600 Hz	118 dB SPL	109 dB SPL
	Peak	124 dB SPL	114 dB SPL
	Average	118 dB SPL	110 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	103 dB SPL	94 dB SPL
	Peak	108 dB SPL	97 dB SPL
	Average	99 dB SPL	93 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz	62 dB	53 dB
	Peak	63 dB	57 dB
	Average	61 dB	52 dB
Frequency range		100 Hz - 9700 Hz	100 Hz - 8800 Hz
Harmonic distortion	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		25 dB SPL	26 dB SPL
Battery drain (stand by)		0.89 mA	0.89 mA
Battery drain		0.91 mA	0.93 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		100 (>80)	95 (>80)
Mobile phone immunity		IRIL: -34/-34/-32 dB SPL	U-rating: M4